

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Hideki Tengeiji, Toshiya Endo and Yoshichi Otake

For: SOLID-STATE IMAGE SENSING APPARATUS AND METHOD OF IMAGE SETTING

Enclosed are:

- ☒ Specification, Claims and Abstract
☒ Seven (7) sheets of drawing(s) (one xerographic copy)
☐ An Assignment of the Invention to ^
☐ A certified copy of the Priority Document (Japanese Application No. 1999-264018)
☐ An Associate Power of Attorney
☐ A Verified Statement to Establish Small Entity Status Under 37 CFR 1.9 and 37 CFR 1.27
☒ A Declaration and Power of Attorney for Patent Application (unsigned)

The filing fee has been calculated as shown below:

Small Entity						Other Than A Small Entity	
For:	No. Filed	No. Extra	Rate	Fee	Or	Rate	Fee
Basic Fee				\$345.00			\$690.00
Total Claims	5-20	0	x9	\$		x18	\$
Indep Claims	2-3	0	x39	\$		x78	\$
Multiple Dep. Claim Presented			130			+260	\$
				Total		Total	\$690.00

— Please charge my Deposit Account No. 18-0987 the amount of \$_____. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$690.00 to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 18-0987. A duplicate copy of this sheet is enclosed.

- ☒ Any additional filing fees required under 37 CFR 1.16
☐ Any patent application processing fees under 37 CFR 1.17

— The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 18-0897. A duplicate copy of this sheet is enclosed.

- ☐ Any patent application processing fees under 37 CFR 1.17
☐ The Issue Fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)
☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims

Respectfully submitted,

Edward G. Greive

Edward G. Greive (Reg. No. 24,726)
 Renner, Kenner, Greive, Bobak, Taylor & Weber
 1610 First National Tower
 Akron, OH 44308-1456
 (330) 376-1242

09-12/00
 jc880 U.S. PTO

jc806 U.S. PTO
 09/660052
 09/12/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the application of

HIDEKI TENGEIJI,
TOSHIYA ENDO and
YOSHICHI OTAKE

Serial No.


Filed

For SOLID-STATE IMAGE
SENSING APPARATUS AND
METHOD OF IMAGE SENSING

**CERTIFICATE OF MAILING VIA
EXPRESS MAIL**

I hereby certify that the following correspondence
was deposited with the United States Postal
Service as Express Mail, postage prepaid, in an
envelope addressed to:

Box PATENT APPLICATION,
Assistant Commissioner for Patents,
Washington, D.C. 20231,
on this 12th day of September, 2000


Norma L. Payerle, Secy. to Edward G. Greive
Express Mail Label No. EL617153165US

TRANSMITTAL SHEET

Enclosed are the following documents:

Specification, Claims and Abstract

Drawings (7 sheets)

Declaration and Power of Attorney (unsigned)

Form PTO-1082 (in duplicate)

Check in the Amount of \$690.00

Certified Copy of Priority Document (Japanese Application No. 1999-264018)

Return Receipt Postcard

**In the event that the enclosed fee is not sufficient, the Commissioner is
hereby authorized to charge payment of any additional fees associated with
this communication or credit any overpayment to Deposit Account No.
18-0987.**

Respectfully Submitted,



Edward G. Greive, Reg. No. 24,726
Renner, Kenner, Greive, Bobak, Taylor & Weber
1610 First National Tower
Akron, Ohio 44308-1456
Telephone: (330) 376-1242

Attorney for Applicants

September 12, 2000

SOLID-STATE IMAGE SENSING APPARATUS AND METHOD OF IMAGE SENSING

BACKGROUND OF THE INVENTION

The present invention relates to image sensing using a solid-state image sensing apparatus. Particularly, this invention relates to image sensing using a solid-state image sensing apparatus with a function of shifting light from an object to shift pixels for enhancing resolution equivalent to the resolution of a solid-state image sensing apparatus having a larger number of pixels.

Video cameras with a digital still-photographing function and digital still cameras install a solid-state image sensing apparatus with a function of shifting light incident to a solid-state image sensing device from an object to shift pixels for enhancing resolution equivalent to the resolution of a solid-state image sensing apparatus having a larger number of pixels (called a pixel-shifting function hereinafter).

Illustrated in FIG. 1 is a timing chart of exposure and reading for a solid-state image sensing device with such a pixel-shifting function.

As illustrated in EXPOSURE TIMING, exposure of a charge-coupled device (CCD) as a solid-state image sensing device for the first frame starts at time t11, charges that have been stored on the CCD are discharged at time t12 by an electronic shutter that is ON (opened) at timing as illustrated in ELECTRONIC SHUTTER TIMING, and exposure starts again.

For progressive-scanning, charges stored on pixels are once transferred to a vertical transfer register at time t13. Then, at timing a1 as illustrated in READ TIMING, the charges are transferred to a horizontal transfer register and read out. The period from time t12 to time t13 is an exposure period c1. Charges stored on the CCD for this period are output as an image signal for the first frame.

Exposure of the CCD for the second frame starts at right after time t13, charges that have been stored on the CCD are discharged at time t14 by the electronic shutter that is ON (opened) at timing as illustrated in ELECTRONIC SHUTTER TIMING,

002160" 2500960

5 The period from the time t14 to time t15 is an exposure period
c2. Charges stored on the CCD for this period are output as an
image signal for the second frame.

10

15

pi

20

30

CC

35

SUMMARY OF THE INVENTION

A purpose of the present invention is to provide an apparatus and a method of image sensing using a solid-state
5 imaging device with a pixel-shifting function that achieve a high shutter speed with less blurry photos.

The present invention provides an image sensing apparatus including: a solid-state image sensing device to convert light from an object into an image signal; a shutter, provided between
10 the object and the solid-state image sensing device, to expose the solid-state image sensing device to the light for a first exposure period and a second exposure period that directly follows the first exposure period, the first and the second periods being the same length in time, each exposure period for exposing the
15 solid-state image sensing device to the light corresponding to one frame or one field of the object; a shift mechanism, to shift a passage of the light that has passed the shutter and incident to the solid-state image sensing device in a predetermined direction with respect to the solid-state image sensing device
20 at least in the second exposure period; and a processor to combine image signals converted for the first and the second exposure periods to generate a composite image signal.

Moreover, the present invention provides a method of image sensing using a solid-state image sensing device for converting
25 light from an object into an image signal. The solid-state image sensing device is exposed to the light for a first exposure period and a second exposure period that directly follows the first exposure period. The first and the second periods are the same length in time. Each exposure period for exposing the solid-
30 state image sensing device to the light corresponds to one frame or one field of the object. A passage of the light incident to the solid-state image sensing device is shifted in a predetermined direction with respect to the solid-state image sensing device at least in the second exposure period. Image signals converted
35 for the first and the second exposure periods are combined to generate a composite image signal.

002160 2509960

into an image signal by photo-to-electric conversion under the control by a timing signal fed by a timing signal generator (TG) 18. The image signal is supplied to a signal processor 19.

The shutter mechanism 11 and the pixel-shift mechanism 12 are controlled by a microprocessor (MPU) 15 via drivers 16 and 17, respectively, in response to the operation of the shutter release button 14.

As illustrated in FIG. 4, the pixel-shifting mechanism 12 is provided with an optical low-pass filter having a glass plate that is shifted between two positions 21a and 21b.

This shifting causes displacement of light passing through the optical low-pass filter by an angle $\delta (= \{(1 - n)/n\} \cdot \sin(i) \cdot t)$ where "i" is a rotary angle from the position 21a to 21b, and vice versa, and "n" is a refraction index. The rotary angle "i"-setting offers displacement of a passage of the incident light by one line to the CCD.

The operation as the first preferred embodiment of the solid-state imaging apparatus according to the present invention will be described with reference to FIGS. 3 and 5.

When a user presses the shutter release button 14 for photographing a still object, light from the object is incident to the imaging circuit 13 through the lens mechanism 10, shutter mechanism 11 and pixel-shifting mechanism 12.

As illustrated in EXPOSURE TIMING of FIG. 5, charges are stored on the CCD from just after time t1 that is a starting moment of the first frame, discharged at time t2 by an electronic shutter of the CCD, that is ON (opened) as illustrated in ELECTRONIC SHUTTER TIMING, and stored again.

At time t3 that is a terminating moment of the first frame, all the charges stored on the CCD are transferred to the vertical transfer register of the imaging circuit 13. The charges are further transferred to the horizontal transfer register of the imaging circuit 13 and read out.

As disclosed, an image signal for the charges stored from time t2 to time t3 is read out at a read timing a1 as illustrated in READ TIMING; and hence the period from time t2 to time t3 is an exposure period 6.

After time t_3 , the MPU 15 controls the pixel-shift mechanism 12 via the driver 17 so that the light incident to the CCD is shifted by one line in the vertical direction, as illustrated in PIXEL-SHIFT TIMING of FIG. 5.

5 The MPU 15 also controls the shutter mechanism 11 via the driver 16 to shut out the light from being incident to the CCD at time 4 after time passes the same period as the exposure period 6, or the exposure period 7. The light is prevented from being incident to the CCD at and after time t_4 .

10 Charges for the second frame are stored on the CCD of the imaging circuit 13 for the period from time t_3 to time t_4 . The charges are kept at time t_4 because no light is incident to the CCD after time t_4 , so that no charges are stored on the CCD, thus causing no overflow, resulting in no discharging operation.

15 All the charges that have been stored on the CCD are transferred to the vertical transfer register at time t_5 at which the second frame terminates under the control by a timing signal fed by the TG 18. The charges are further transferred to the horizontal transfer register and read out.

20 As disclosed, an image signal for the charges stored from time t_3 to time t_4 is read out from the imaging circuit 13 at time t_5 , or a read timing a_2 as illustrated in READ TIMING; and hence the period from time t_3 to time t_4 is an exposure period 7 as illustrated in EXPOSURE TIMING, by the mechanical shutter
25 whose timing is illustrated as MECHANICAL SHUTTER TIMING.

The image signals for the first and the second frames are supplied to the signal processor 19 and combined as an output composite imaging signal, as illustrated in SIGNAL PROCESSING 5.

30 In this embodiment, the displacement "d" of the image signals in time for the first and the second frames corresponds to the exposure time 6 from time t_2 to time t_3 , which is shorter than those shown in FIGS. 1 and 2, thus avoiding blurry photos.

35 Next, the operation as the second preferred embodiment of the solid-state imaging apparatus according to the present invention will be described with reference to FIG. 6. A shutter speed is higher in the second embodiment than that in the first

embodiment.

At time t_1 illustrated in EXPOSURE TIMING of FIG. 6, that is a starting moment of the first frame right after a user presses the shutter release button 14, charges are stored on the CCD of the imaging circuit 13, discharged at time t_6 by the electronic shutter of the CCD, that is ON (opened) as illustrated in ELECTRONIC SHUTTER TIMING, and stored again. The time t_6 in FIG. 6 is later than time t_2 in FIG. 5 with respect to time t_1 . The electronic shutter has been ON (opened) after time t_6 .

At time t_3 that is a terminating moment of the first frame, all the charges stored on the CCD are transferred to the vertical transfer register of the imaging circuit 13. The charges are further transferred to the horizontal transfer register of the imaging circuit 13 and read out.

As disclosed, an image signal for the charges stored from time t_6 to time t_3 is read out at a read timing a_1 as illustrated in READ TIMING; and hence the period from time t_6 to time t_3 is an exposure period 8. The higher the shutter speed, the shorter the exposure period 8.

After time t_3 , the MPU 15 controls the pixel-shift mechanism 12 via the driver 17 so that the light incident to the CCD is shifted by one line in the vertical direction, as illustrated in PIXEL-SHIFT TIMING of FIG. 6.

The MPU 15 also controls the shutter mechanism 11 via the driver 16 to shut out the light from being incident to the CCD at time t_7 after time passes the same period as the exposure period 8, or the exposure period 9. The light is prevented from being incident to the CCD at and after time t_7 .

Charges for the second frame are stored on the CCD of the imaging circuit 13 for the period from time t_3 to time t_7 . The charges are kept at time t_7 because no light is incident to the CCD after time t_7 , so that no charges are stored on the CCD, thus causing no overflow, resulting in no discharging operation.

All the charges that have been stored on the CCD are transferred to the vertical transfer register at time t_7 at which the second frame terminates under the control by a timing signal fed by the TG 18. The charges are further transferred to the

horizontal transfer register and read out.

As disclosed, an image signal for the charges stored from time t_3 to time t_7 is read out from the imaging circuit 13 at time t_5 , or a read timing a_2 as illustrated in READ TIMING; and hence the period from time t_3 to time t_7 is an exposure period 9 as illustrated in EXPOSURE TIMING, by the mechanical shutter whose timing is illustrated as MECHANICAL SHUTTER TIMING.

The image signals for the first and the second frames are supplied to the signal processor 19 and combined as an output composite imaging signal, as illustrated in SIGNAL PROCESSING 5.

In this embodiment, the displacement "d" of the image signals in time for the first and the second frames corresponds to the exposure time 8 from time t_6 to time t_3 , being shorter than that shown in FIG. 5, thus further avoiding blurry photos.

Next, the operation as the third preferred embodiment of the solid-state imaging apparatus according to the present invention will be described.

In the first and the second embodiments shown in FIGS. 5 and 6, the optical low-pass filter of the pixel-shift mechanism 12 is rotated by the angle "i" between the positions 21a and 21b, as shown in FIG. 4, for pixel-shifting at time t_3 that is the starting moment of the second frame.

Compared to these embodiments, in the third embodiment, the optical low-pass filter of the pixel-shift mechanism 12 starts to rotate at time t_a within the exposure period 8 just before time t_3 , and stops at time t_b within the exposure period 9, as shown in FIG. 7. The illustration in (a) of FIG. 7 corresponds to that of EXPOSURE TIMING in FIG. 6. The period T1 from time t_a to time t_3 and the period T2 from time t_3 to t_b are preferably equal to each other, but not a must.

As disclosed, rotation of the optical low-pass filter of the pixel-shift mechanism 12 over the exposure periods 8 and 9 further avoids blurry photos.

The present invention is not limited to the embodiments disclosed above.

The electronic shutter is employed in the embodiments for

exposure for the first frame. However, the mechanical shutter can be employed for exposure for the first frame.

The embodiments combine the image signals for two successive frames. However, image signals for two successive fields can be combined for obtaining a composite image signal.

Not only a still image but also a moving picture can be processed by the present invention.

Image scanning in the embodiments is a progressive scanning-type. However, the present invention can employ an interlace scanning-type image sensing apparatus.

As disclosed above, according to the present invention, the image sensing device is exposed to light from an object by a shutter, provided between the object and the solid-state image sensing device, for a first exposure period and a second exposure period that directly follows the first exposure period. The first and the second periods are the same length in time. Each exposure period for exposing the solid-state image sensing device to the light corresponds to one frame or one field of the object. A passage of the light that has passed the shutter and incident to the solid-state image sensing device is shifted in a predetermined direction with respect to the solid-state image sensing device at least in the second exposure period. Image signals converted for the first and the second exposure periods are combined to generate a composite image signal.

Thus, the present invention offers a pixel-shifting function with less blurry photos for solid-state image sensing apparatus.

Moreover, according to the present invention, the passage of light incident to the solid-state image sensing device can be shifted for a period from a moment in the first exposure period to another moment in the second exposure period.

This arrangement offers a pixel-shifting function with less blurry photos at high shutter speed for solid-state image sensing apparatus.

09660052.091200

1. An image sensing apparatus comprising:

a shutter, provided between the object and the solid-state image sensing device, to expose the solid-state image sensing device to the light for a first exposure period and a second exposure period that directly follows the first exposure period, the first and the second periods being the same length in time, each exposure period for exposing the solid-state image sensing device to the light corresponding to one frame or one field of the object;

a processor to combine image signals converted for the first and the second exposure periods to generate a composite image signal.

3. The apparatus according to claim 1, wherein the shift mechanism includes an optical low-pass filter that rotates between two predetermined positions to shift the passage of light in the predetermined direction.

exposing the solid-state image sensing device to the light

for a first exposure period and a second exposure period that directly follows the first exposure period, the first and the second periods being the same length in time, each exposure period for exposing the solid-state image sensing device to the light corresponding to one frame or one field of the object;

shifting a passage of the light incident to the solid-state image sensing device in a predetermined direction with respect to the solid-state image sensing device at least in the second exposure period; and

combining image signals converted for the first and the second exposure periods to generate a composite image signal.

5. The method according to claim 4, wherein the shifting step includes the step of shifting the passage of light for a period from a moment in the first exposure period to another moment in the second exposure period.

05660052 091200

ABSTRACT OF THE DISCLOSURE

Light from an object is incident to an image sensing device and converted into an image signal. The image sensing device is
5 exposed to the light by a shutter, provided between the object and the solid-state image sensing device, for a first exposure period and a second exposure period that directly follows the first exposure period. The first and the second periods are the same length in time. Each exposure period for exposing the
10 solid-state image sensing device to the light corresponds to one frame or one field of the object. A passage of the light that has passed the shutter and incident to the solid-state image sensing device is shifted in a predetermined direction with respect to the solid-state image sensing device at least in the
15 second exposure period. Image signals converted for the first and the second exposure periods are combined to generate a composite image signal.

09660052-091200

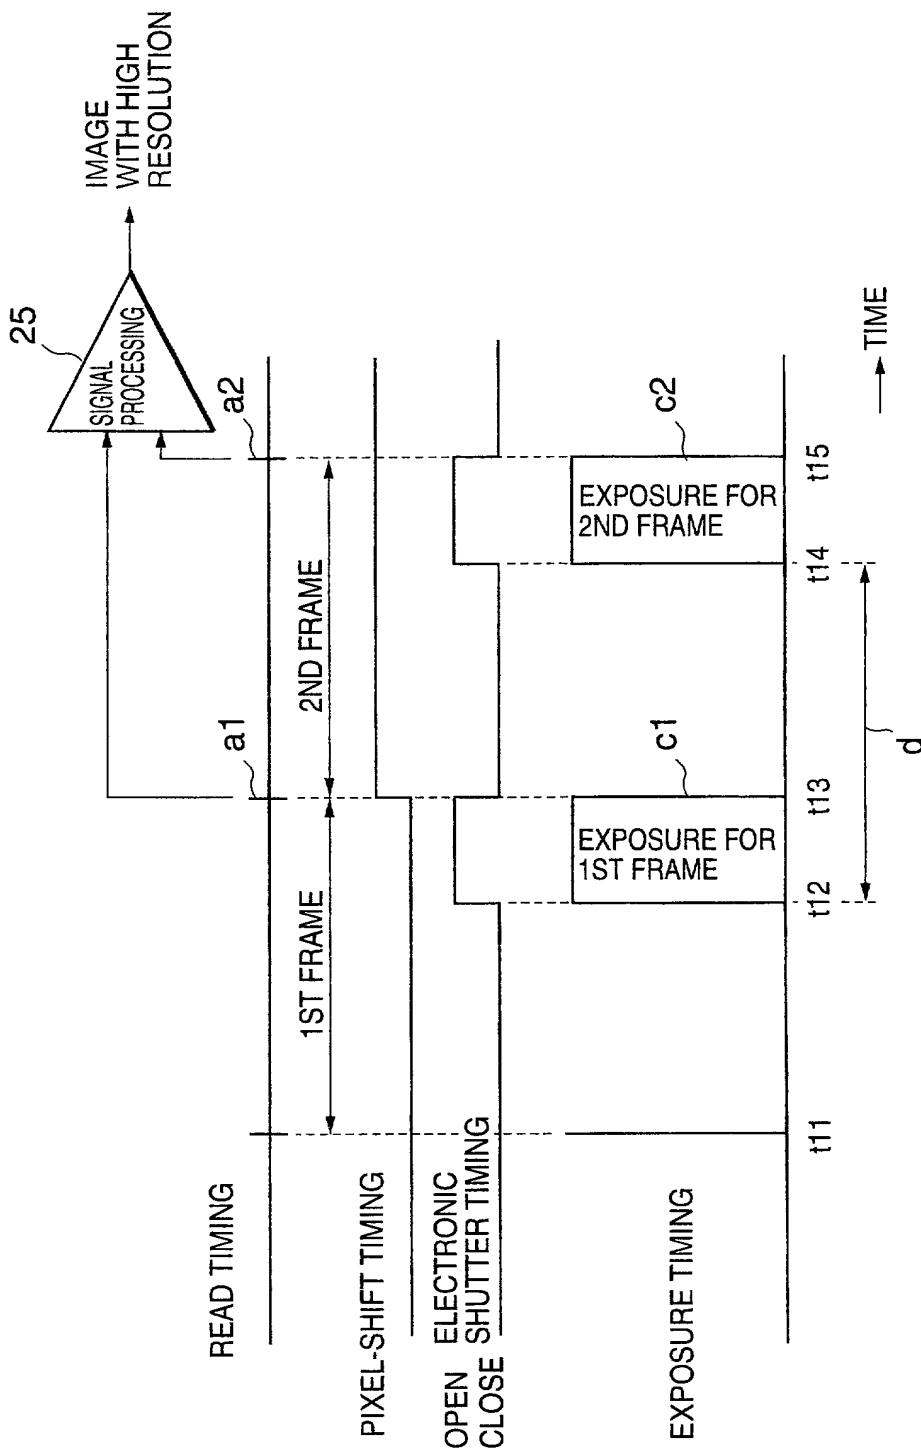


FIG.1 (RELATED ART)

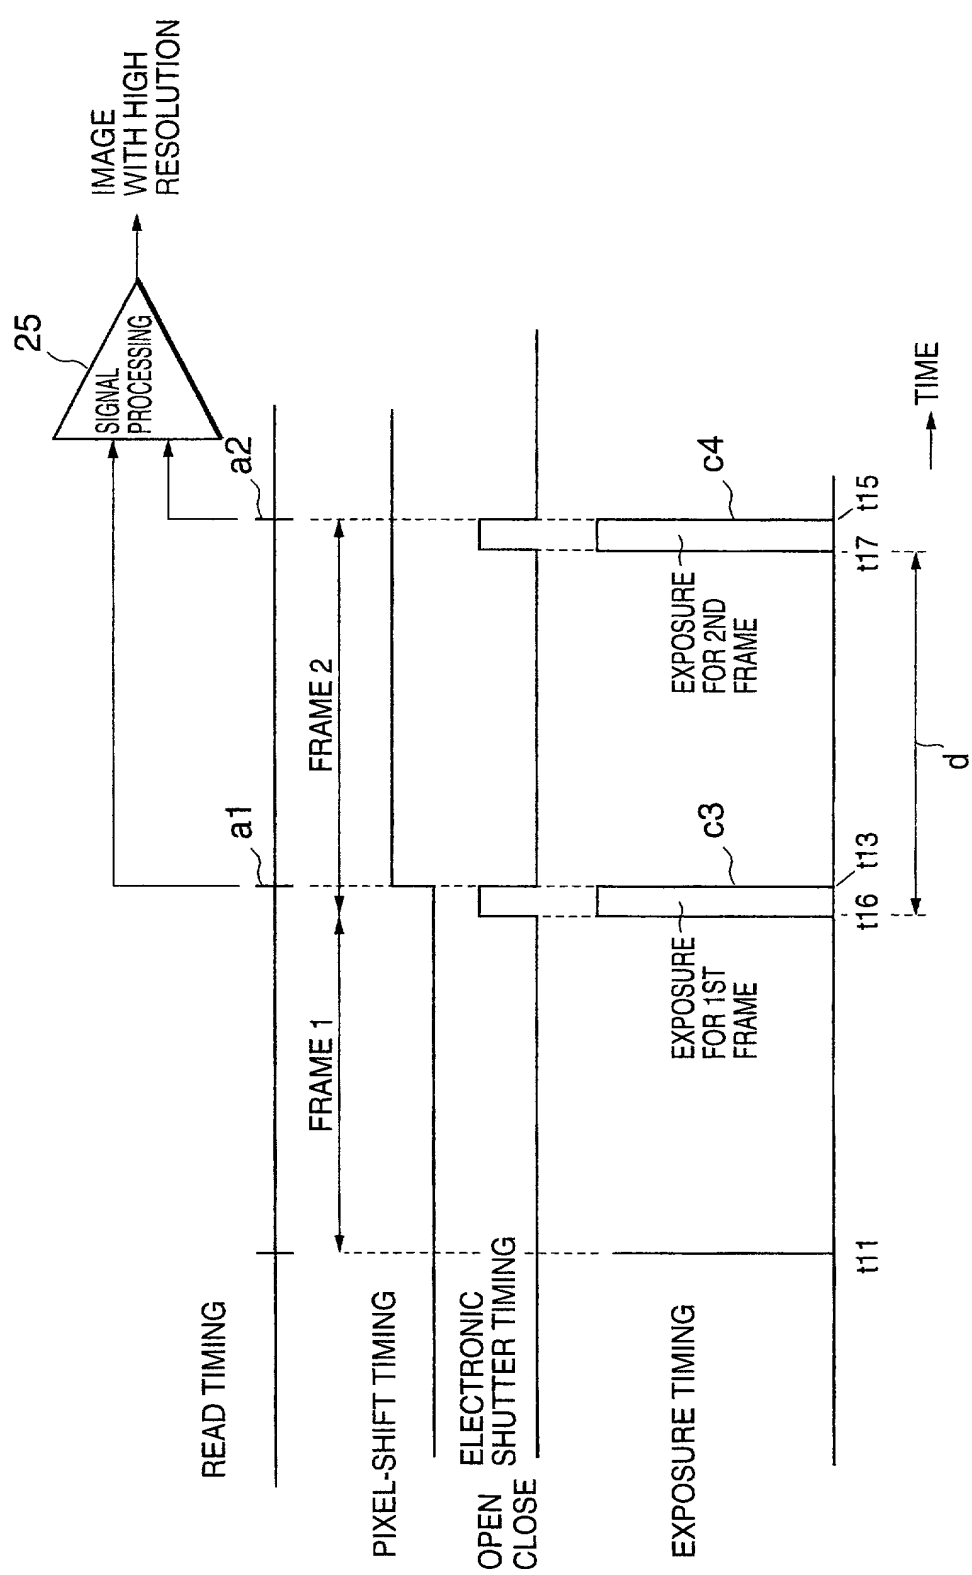


FIG.2 (RELATED ART)

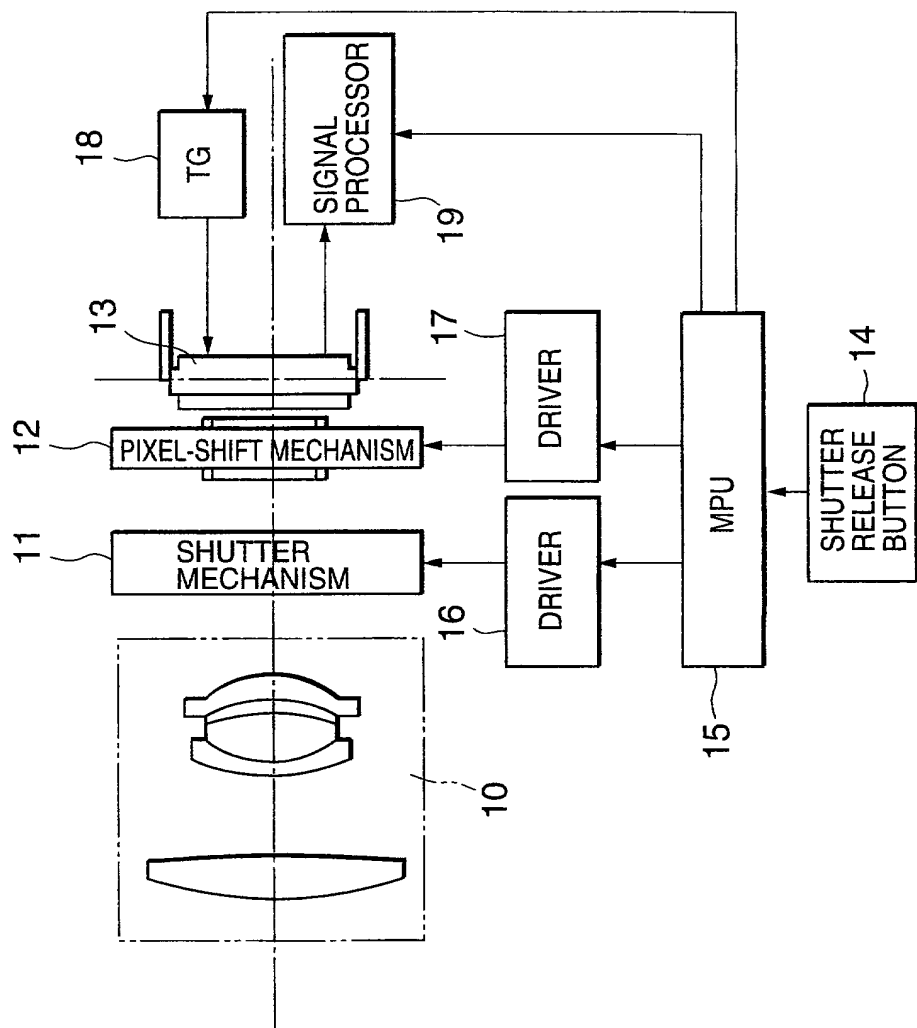


FIG. 3

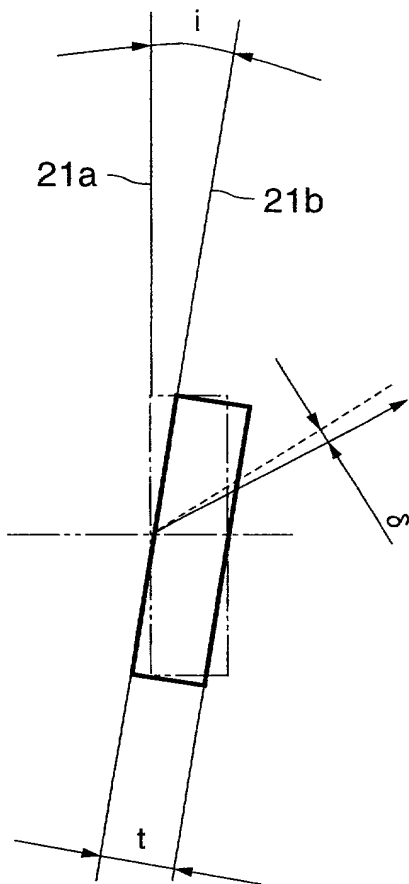


FIG.4

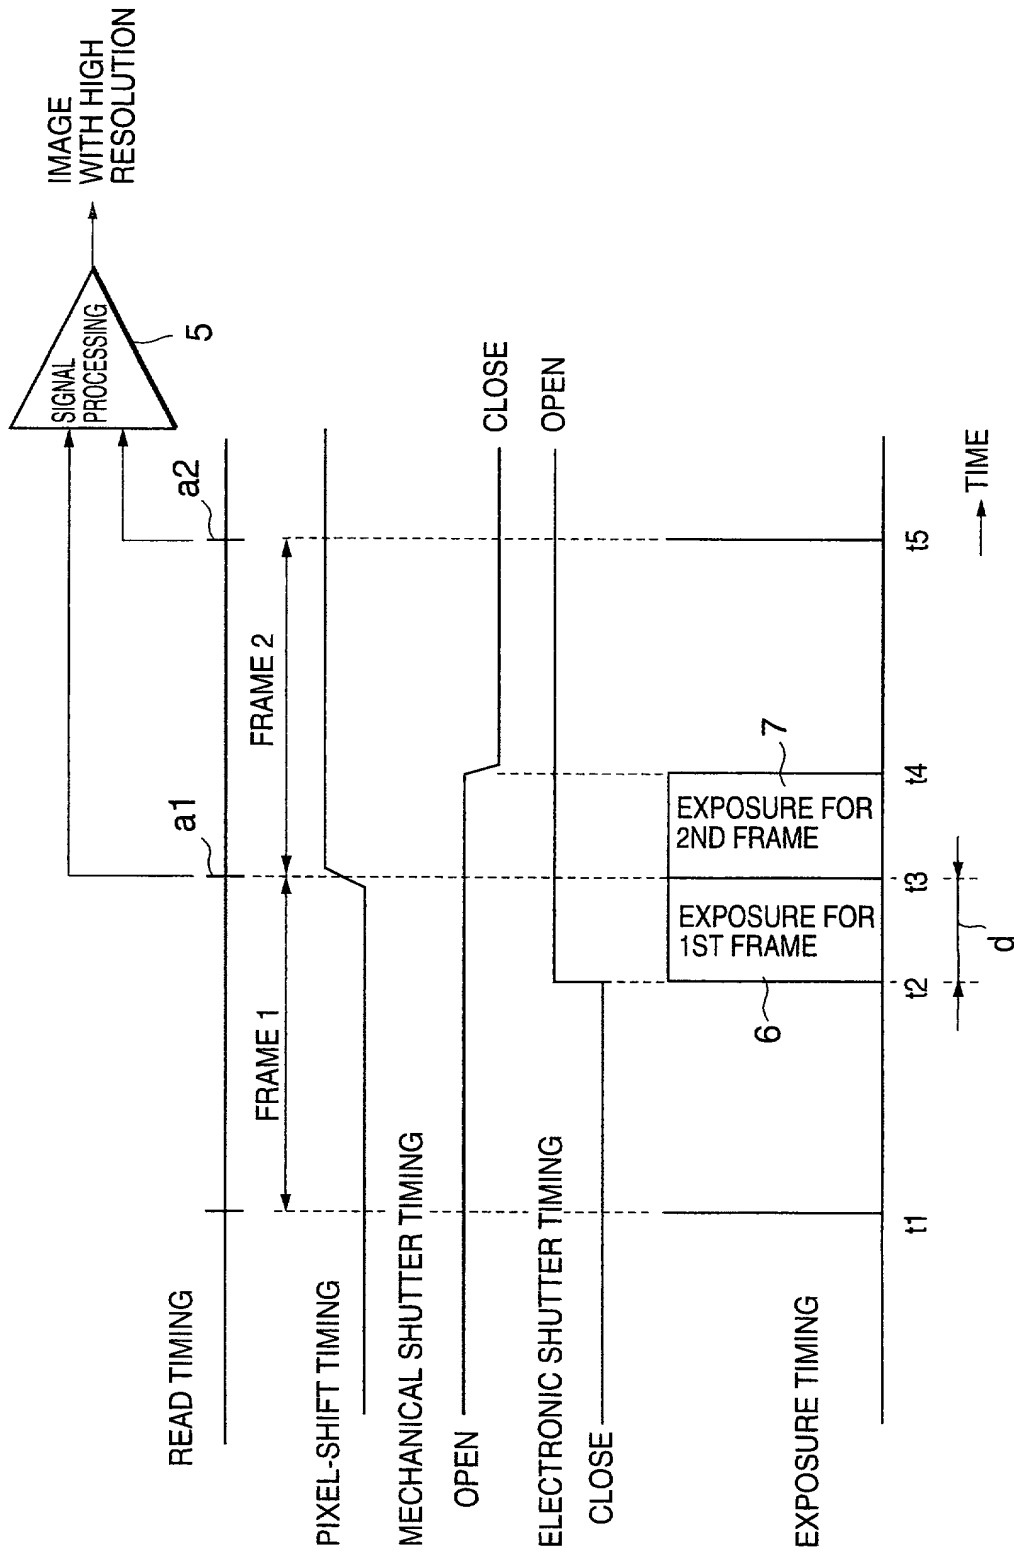


FIG.5

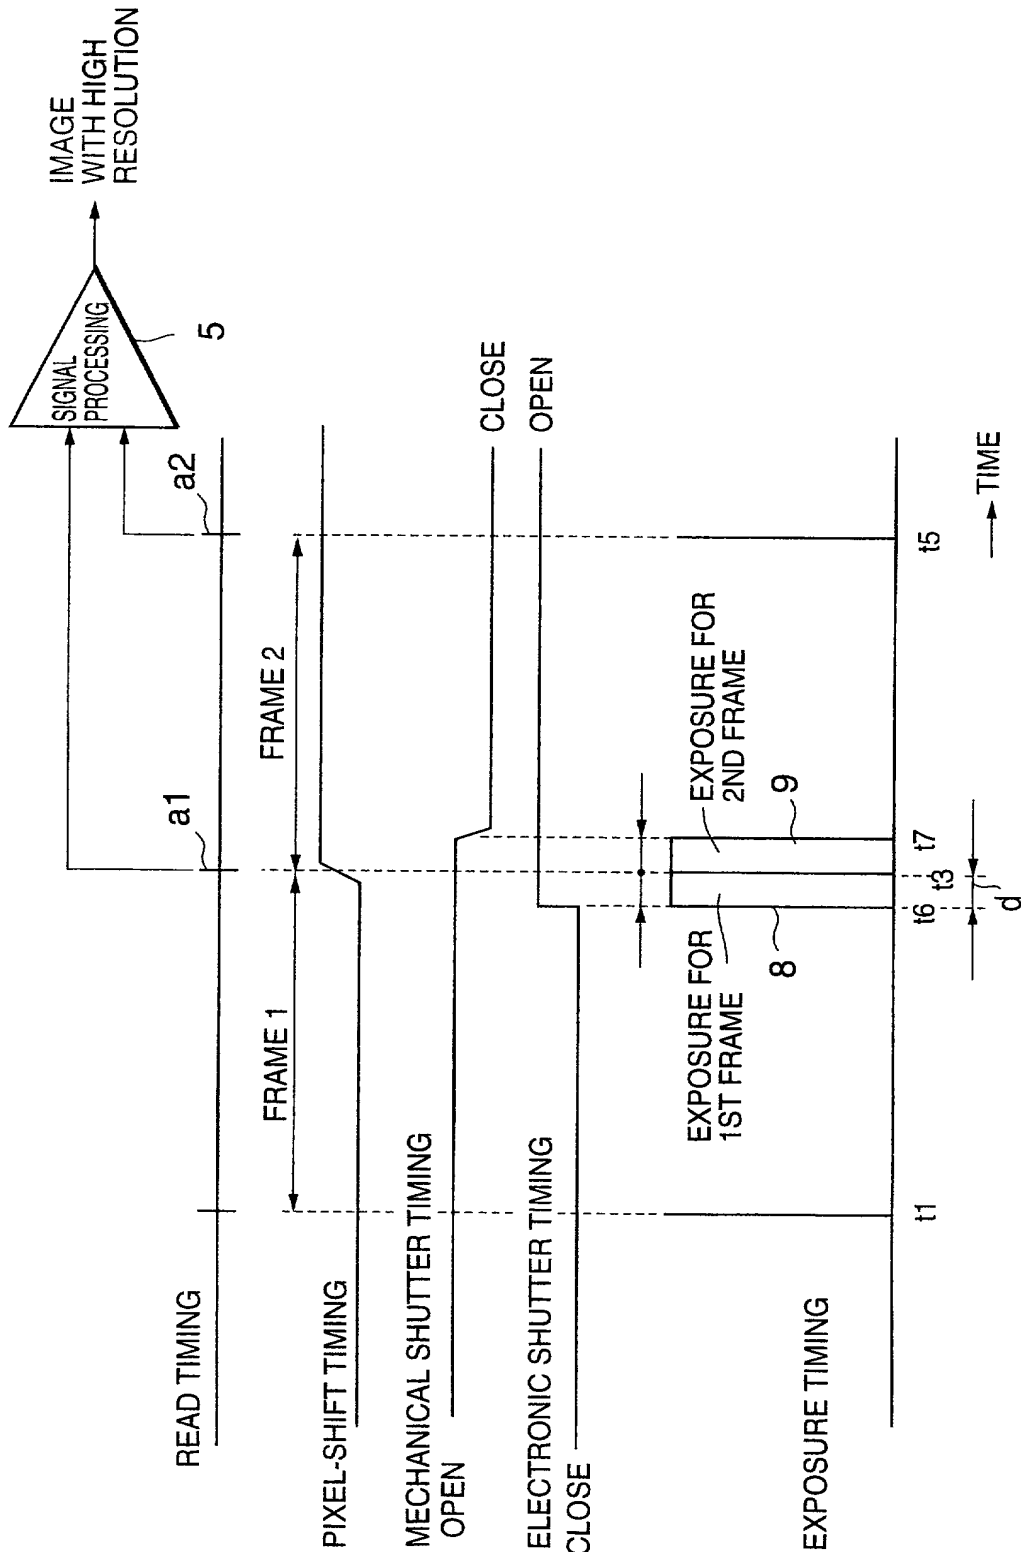


FIG.6

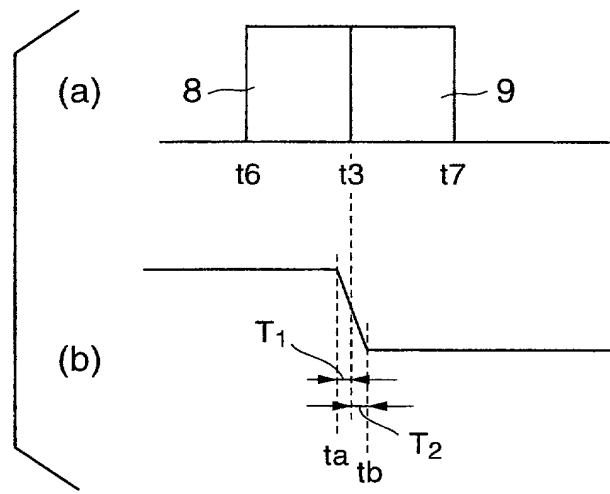


FIG.7

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As below named inventors, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names.

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SOLID-STATE IMAGE SENSING APPARATUS AND METHOD OF IMAGE SENSING

the specification of which

X is attached hereto.

— was filed on _____ as Application Serial No. _____
and was amended on _____.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed</u>	
			<u>Yes</u>	<u>No</u>
1999-264018	Japan	September 17, 1999	X	

English Language Declaration

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Ser. No.	Filing Date	Status
----------------------	-------------	--------

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As named inventors, we hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Edward G. Greive (Reg. No. 24,726); Reese Taylor (Reg. No. 22,325); Phillip L. Kenner (Reg. No. 22,353); Donald J. Bobak (Reg. No. 27,182), Ray L. Weber (Reg. No. 26,519), Rodney L. Skoglund (Reg. No. 36,010), Richard B. O'Planick (Reg. No. 29,096), Joseph G. Curatolo (Reg. No. 28,837), Andrew B. Morton (Reg. No. 37,400), Arthur M. Reginelli (Reg. No. 40,139), Shannon V. McCue (Reg. No. 42,859), Michael F. Morgan (Reg. No. 42,906), Salvatore A. Sidoti (Reg. No. 43,921), John J. Cunniff (Reg. No. 42,451); and Mark L. Weber (Reg. No. 46,069)

09000000

Direct Telephone Calls to: **Edward G. Greive**
Telephone: (330) 376-1242

Citizenship: Japan

Citizenship: Japan

English Language Declaration

Inventor: _____ Date _____
Yoshichi Otake

Residence: 5-91-1, Inamuragasaki, Kamakura-Shi
Kanagawa-Ken, Japan

Post Office Address: 5-91-1, Inamuragasaki, Kamakura-Shi
Kanagawa-Ken, Japan

Citizenship: Japan